




HIGH PERFORMANCE DIGITAL IMAGING
made easy

RETIGA 2000R *FAST1394*

High-Sensitivity IEEE 1394 FireWire™ Digital CCD Camera – Monochrome or Color

The QImaging Retiga 2000R digital camera features enhanced visible-range quantum efficiency resulting in high sensitivity that is ideal for brightfield, machine vision, metrology, and metallurgical imaging applications. A progressive-scan interline CCD sensor gives a resolution of 1.92 million pixels in a 12-bit digital output. High-speed, low-noise electronics provide linear digital data for rapid image capture. The IEEE 1394 FireWire™ digital interface allows ease of use and installation with a single wire. No framegrabber or external power supply is required. The Retiga 2000R includes QCapture software (Windows® and Mac OS) for real-time image preview and capture. A **Software Development Kit (SDK)** is available upon request for interfacing with custom software.

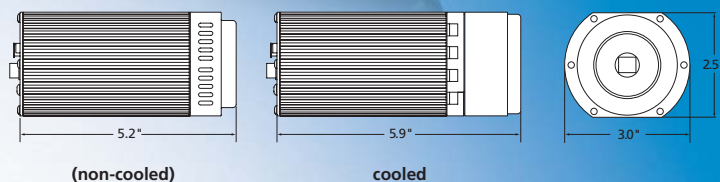

Note: Lenses are shown for illustration only and are not included.

CAMERA MODELS	FEATURES	BENEFITS
<p><i>Includes: IEEE 1394 FireWire™ cable, IEEE 1394 PCI card, QCapture software, QCapture Pro software, IEEE 1394 power supply (cooled version only), & access to SDK</i></p> <ul style="list-style-type: none"> ▪ Monochrome Retiga 2000R Cooled Model: RET-2000R-F-M-12-C ▪ Monochrome Retiga 2000R Non-Cooled Model: RET-2000R-F-M-12 ▪ Color Retiga 2000R Cooled Model: RET-2000R-F-CLR-12-C ▪ Color Retiga 2000R Non-Cooled Model: RET-2000R-F-CLR-12 	High-Resolution, 1.92-Million-Pixel Sensor	▪ Highly detailed, sharp images
	Large Pixels (7.4µm x 7.4µm)	▪ High sensitivity, high dynamic range, large well capacity
	High-Speed Readout	▪ Previewing & focusing in real time ▪ 227fps maximum frame rate ▪ 10fps full resolution @ 12 bits ▪ Ideal for automated imaging applications
	Low-Noise Electronics	▪ Quantitation & imaging of low light levels
	12-Bit Digitization/ 36-Bit Color Digitization (with Optional RGB Filter)	▪ 4096 grey levels for precise light-intensity discrimination ▪ 4096 levels per channel for superior color images
	External Sync & Trigger	▪ Tight synchronization with flashlamps, automated filters, shutters, & microscope stages
	Peltier Cooling	▪ Minimizes thermal noise during low-light, long-exposure imaging
	Binning	▪ Increases sensitivity for quantitation & imaging of very low light levels ▪ Increases frame rate
	IEEE 1394 FireWire™ QImaging Fast 1394 Technology	▪ Simple connectivity ▪ Ease of use & installation ▪ Portability with laptop computer ▪ Simultaneous use of multiple cameras through a single port ▪ Single-cable operation (no external power supply or control unit)
	Extensive Application Software Support	▪ Choose from a large selection of life science & industrial software for microscopy, machine vision, & video-streaming functions

CAMERA OPTIONS

- **RGB Color Filter** for monochrome cameras (F-mount interface required), refer to spec sheet for more details



- **Extended Warranty**

RETIGA 2000R FAST 1394 SPECIFICATIONS

APPLICATIONS

- Brightfield, Phase-Contrast, & Darkfield Microscopy
- Live-Cell Imaging
- Pathology, Histology, & Cytology
- FISH
- Ca⁺⁺ Ratio Analysis
- Motility & Motion Analysis
- DNA Analysis
- Metallurgical Microscopy
- Semiconductor Inspection
- Manufacturing Quality Control
- Failure Analysis
- Forensic Analysis


CCD SENSOR

Light-Sensitive Pixels	1.92 million; 1600 x 1200
Binning Modes	2x2, 4x4, 8x8
ROI (Region of Interest)	From 1x1 pixels up to full resolution, continuously variable in single-pixel increments
Exposure/Integration Control	10µs to 17.9min in 1µs increments
Sensor Type	Kodak® KAI-2020 progressive-scan interline CCD (monochrome or color)
Pixel Size	7.4µm x 7.4µm
Linear Full Well	20,000e- without binning
Read Noise	16e-
Dark Current	4*e-/pix/s (cooled)
Cooling Available	Yes (optional)
Cooling Type	Peltier thermoelectric cooling to 25°C below ambient
Digital Output	12 bits
Readout Frequency	20, 10, 5, 2.5MHz
Frame Rate	10fps full resolution @ 12 bits (227fps maximum with binning and ROI functions)

CAMERA

Computer Platforms/Operating Systems	Windows® & Mac OS**
Digital Interface	IEEE 1394 FireWire™
Sustained Image Data Rate	40MB/s
Shutter Control	Electronic shutter, no moving parts
External Trigger	TTL Input
Trigger Types	Internal, Software, External
External Sync	TTL Output
Gain Control	0.5 to 20x
Offset Control	-2048 to 2047
Optical Interface	1", C-mount optical format
Threadmount	1/4" — 20 mount
Power Requirements	11W (non-cooled); 17W (cooled)
Weight	585g (non-cooled); 845g (cooled)
Warranty	2 years
Operating Environment	0 to 50°C (32 to 122°F)
Storage Temperature	-10 to 60°C
Humidity	Less than 80% non-condensing at 35°C (95°F)

SPECTRAL RESPONSE

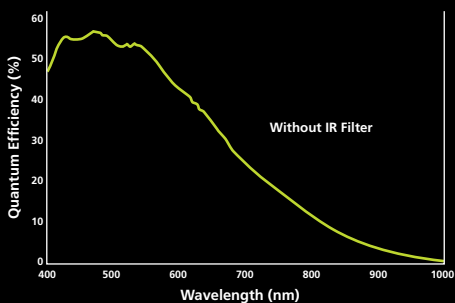

* Nominal rating; 30e-/pix/s maximum for non-cooled cameras.

** Refer to QImaging website for detailed listing of supported operating systems.

Note: Specifications are nominal and subject to change.

04-0017A-A



4401 Still Creek Drive, Suite 100
 Burnaby BC Canada V5C 6G9
 Tel 604.708.5061
 Fax 604.708.5081
 INFO@QIMAGING.COM
WWW.QIMAGING.COM

FireWire and Mac OS are trademarks of Apple Computer, Inc., registered in the U.S. and other countries. Kodak is a registered trademark of Eastman Kodak Company. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Other brand and product names are the trademarks or registered trademarks of their respective owners and manufacturers.